


Ⓓ

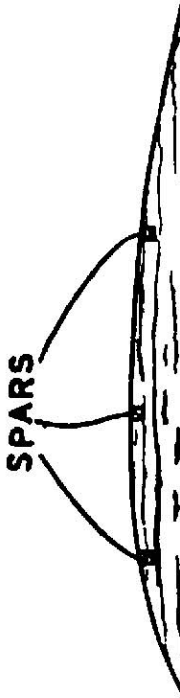

OTTOM
SPAR

CUT THIS TEMPLATE

TS


CENTRE
SECTION

WING RIBS
1/16" SHEET

" RIBS LET IN "
TO
TRAILING
EDGE


START
WING

SEE NOTE AND
SKETCHES FOR
TILT IN THESE
END RIBS




F1

F2

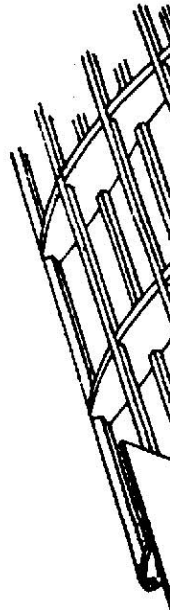

EMBI ATE

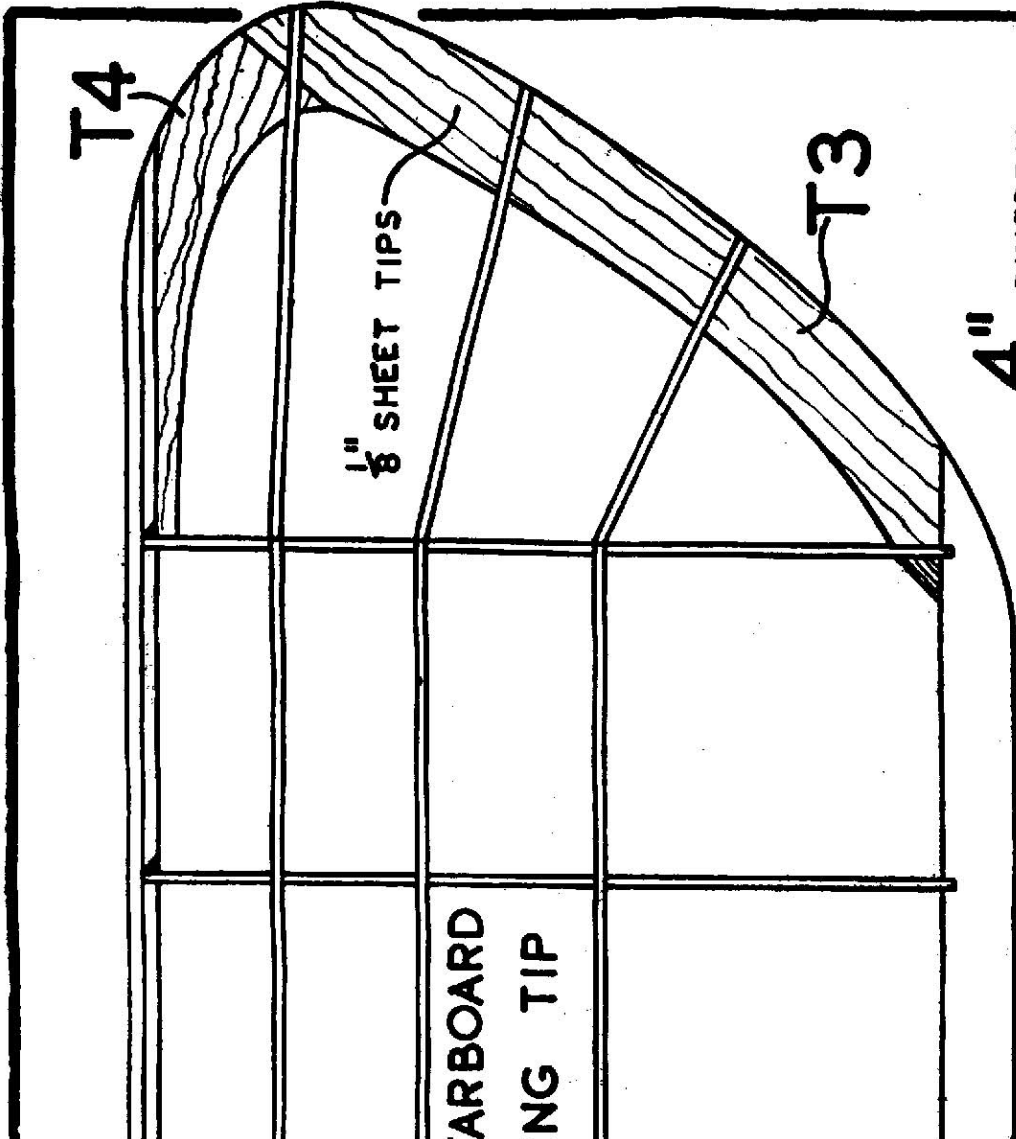


4" DIHEDRAL
 AT EACH TIP

ARBOARD
 NG TIP

SENATOR 3-VIEW



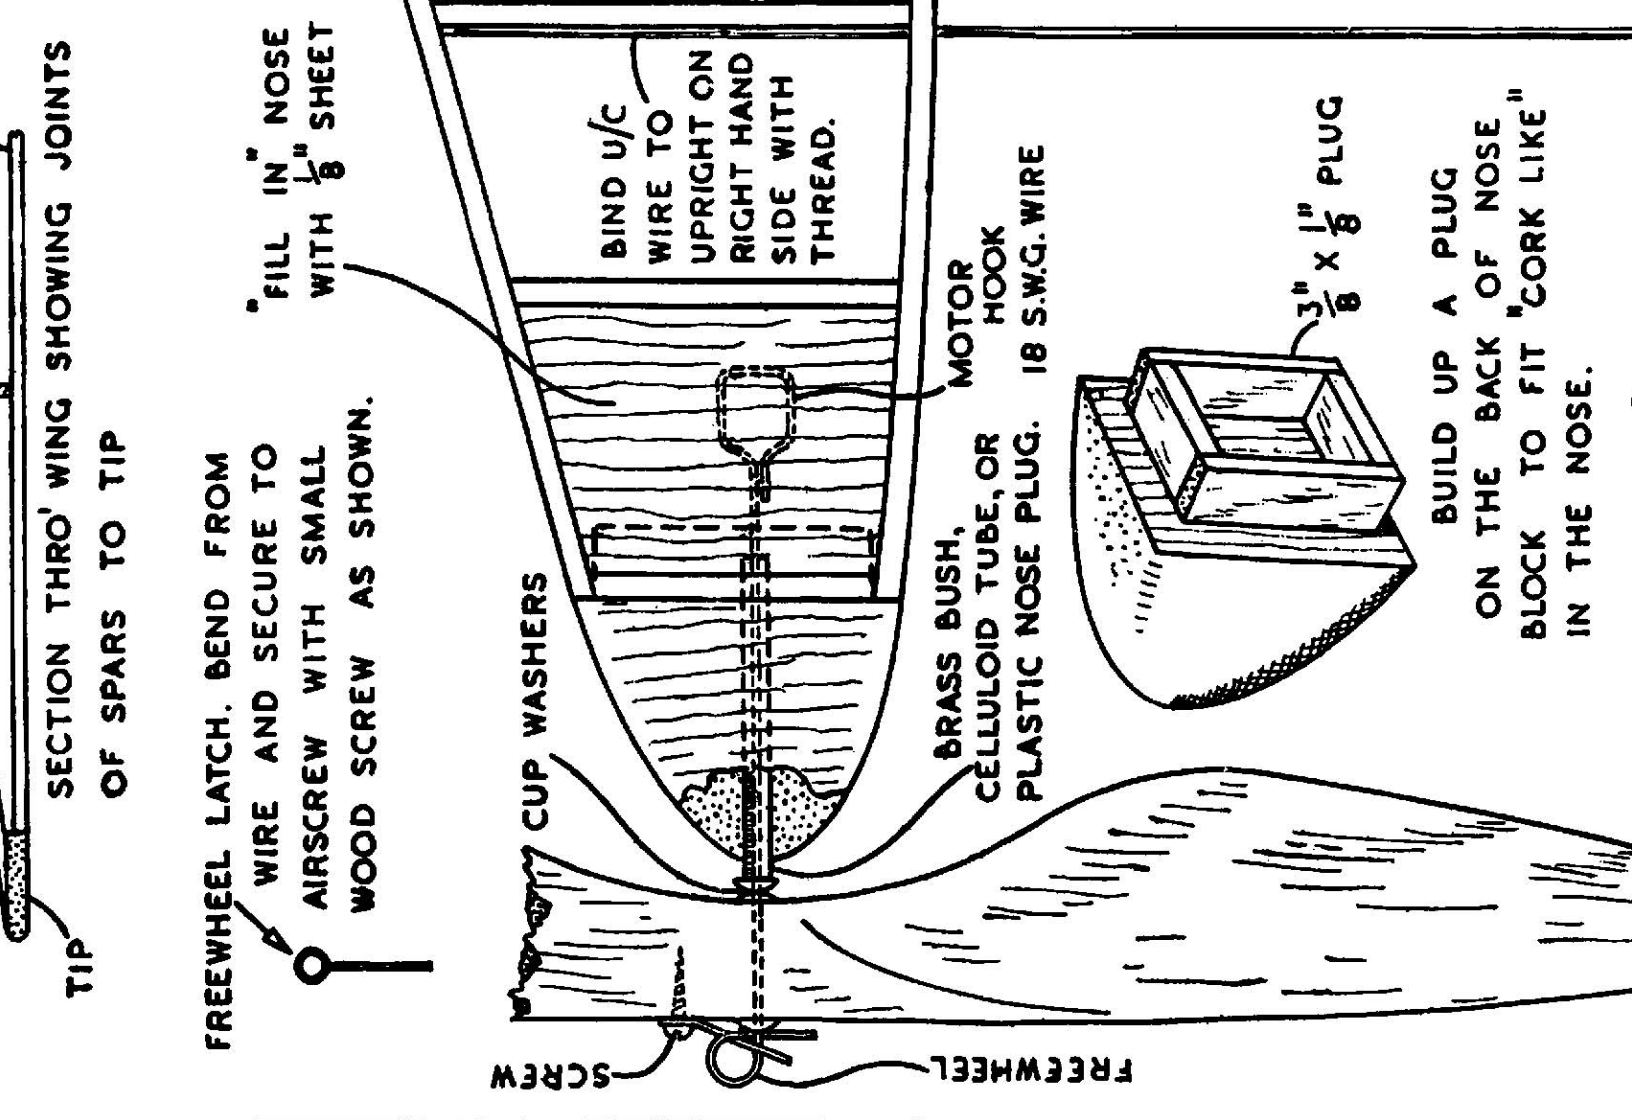

TIP
SECTION THRO' WING SHOWING JOINTS
OF SPARS TO TIP

FREEWHEEL LATCH. BEND FROM
WIRE AND SECURE TO
AIRSCREW WITH SMALL
WOOD SCREW AS SHOWN.

BIND U/C
WIRE TO
UPRIGHT ON
RIGHT HAND
SIDE WITH
THREAD.


CUP WASHERS

BRASS BUSH, MOTOR
CELLULOID TUBE, OR
PLASTIC NOSE PLUG. 18 S.W.G. WIRE

3 1/8 x 1/8 PLUG

BUILD UP A PLUG
ON THE BACK OF NOSE
BLOCK TO FIT "CORK LIKE"
IN THE NOSE.

FREEWHEEL
SCREW

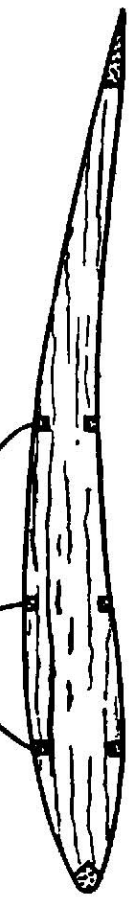

TYPICAL WING SECTION. SAND LEADING AND TRAILING EDGES TO SHAPES SHOWN

WING POSITION

1/8" SHEET GUSSETS TO RETAIN WING DOWELS

CELLULOID

LONGERONS 1/8" x 1/8"

SIDE VIEW OF FUSELAGE

CUT THIS TEMPLATE FROM CARD

FULL SIZE LAYOUT OF UNDERCARRIAGE WIRE BEND TO THIS PATTERN FROM 18 S.W.G. WIRE

POWER YOUR MODEL WITH 6 STRANDS OF 1/4" x 1/30 RUBBER

SH


LOWER SPAR


CRACK SPARS HERE AND RE-CEMENT

LEADING EDGE 1/8" x 1/8"

1/16" x 1/16" SPARS TOP & BOTTOM

TAILPLANE

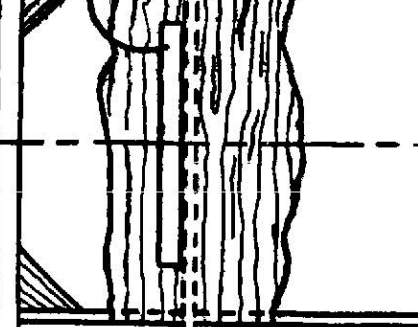

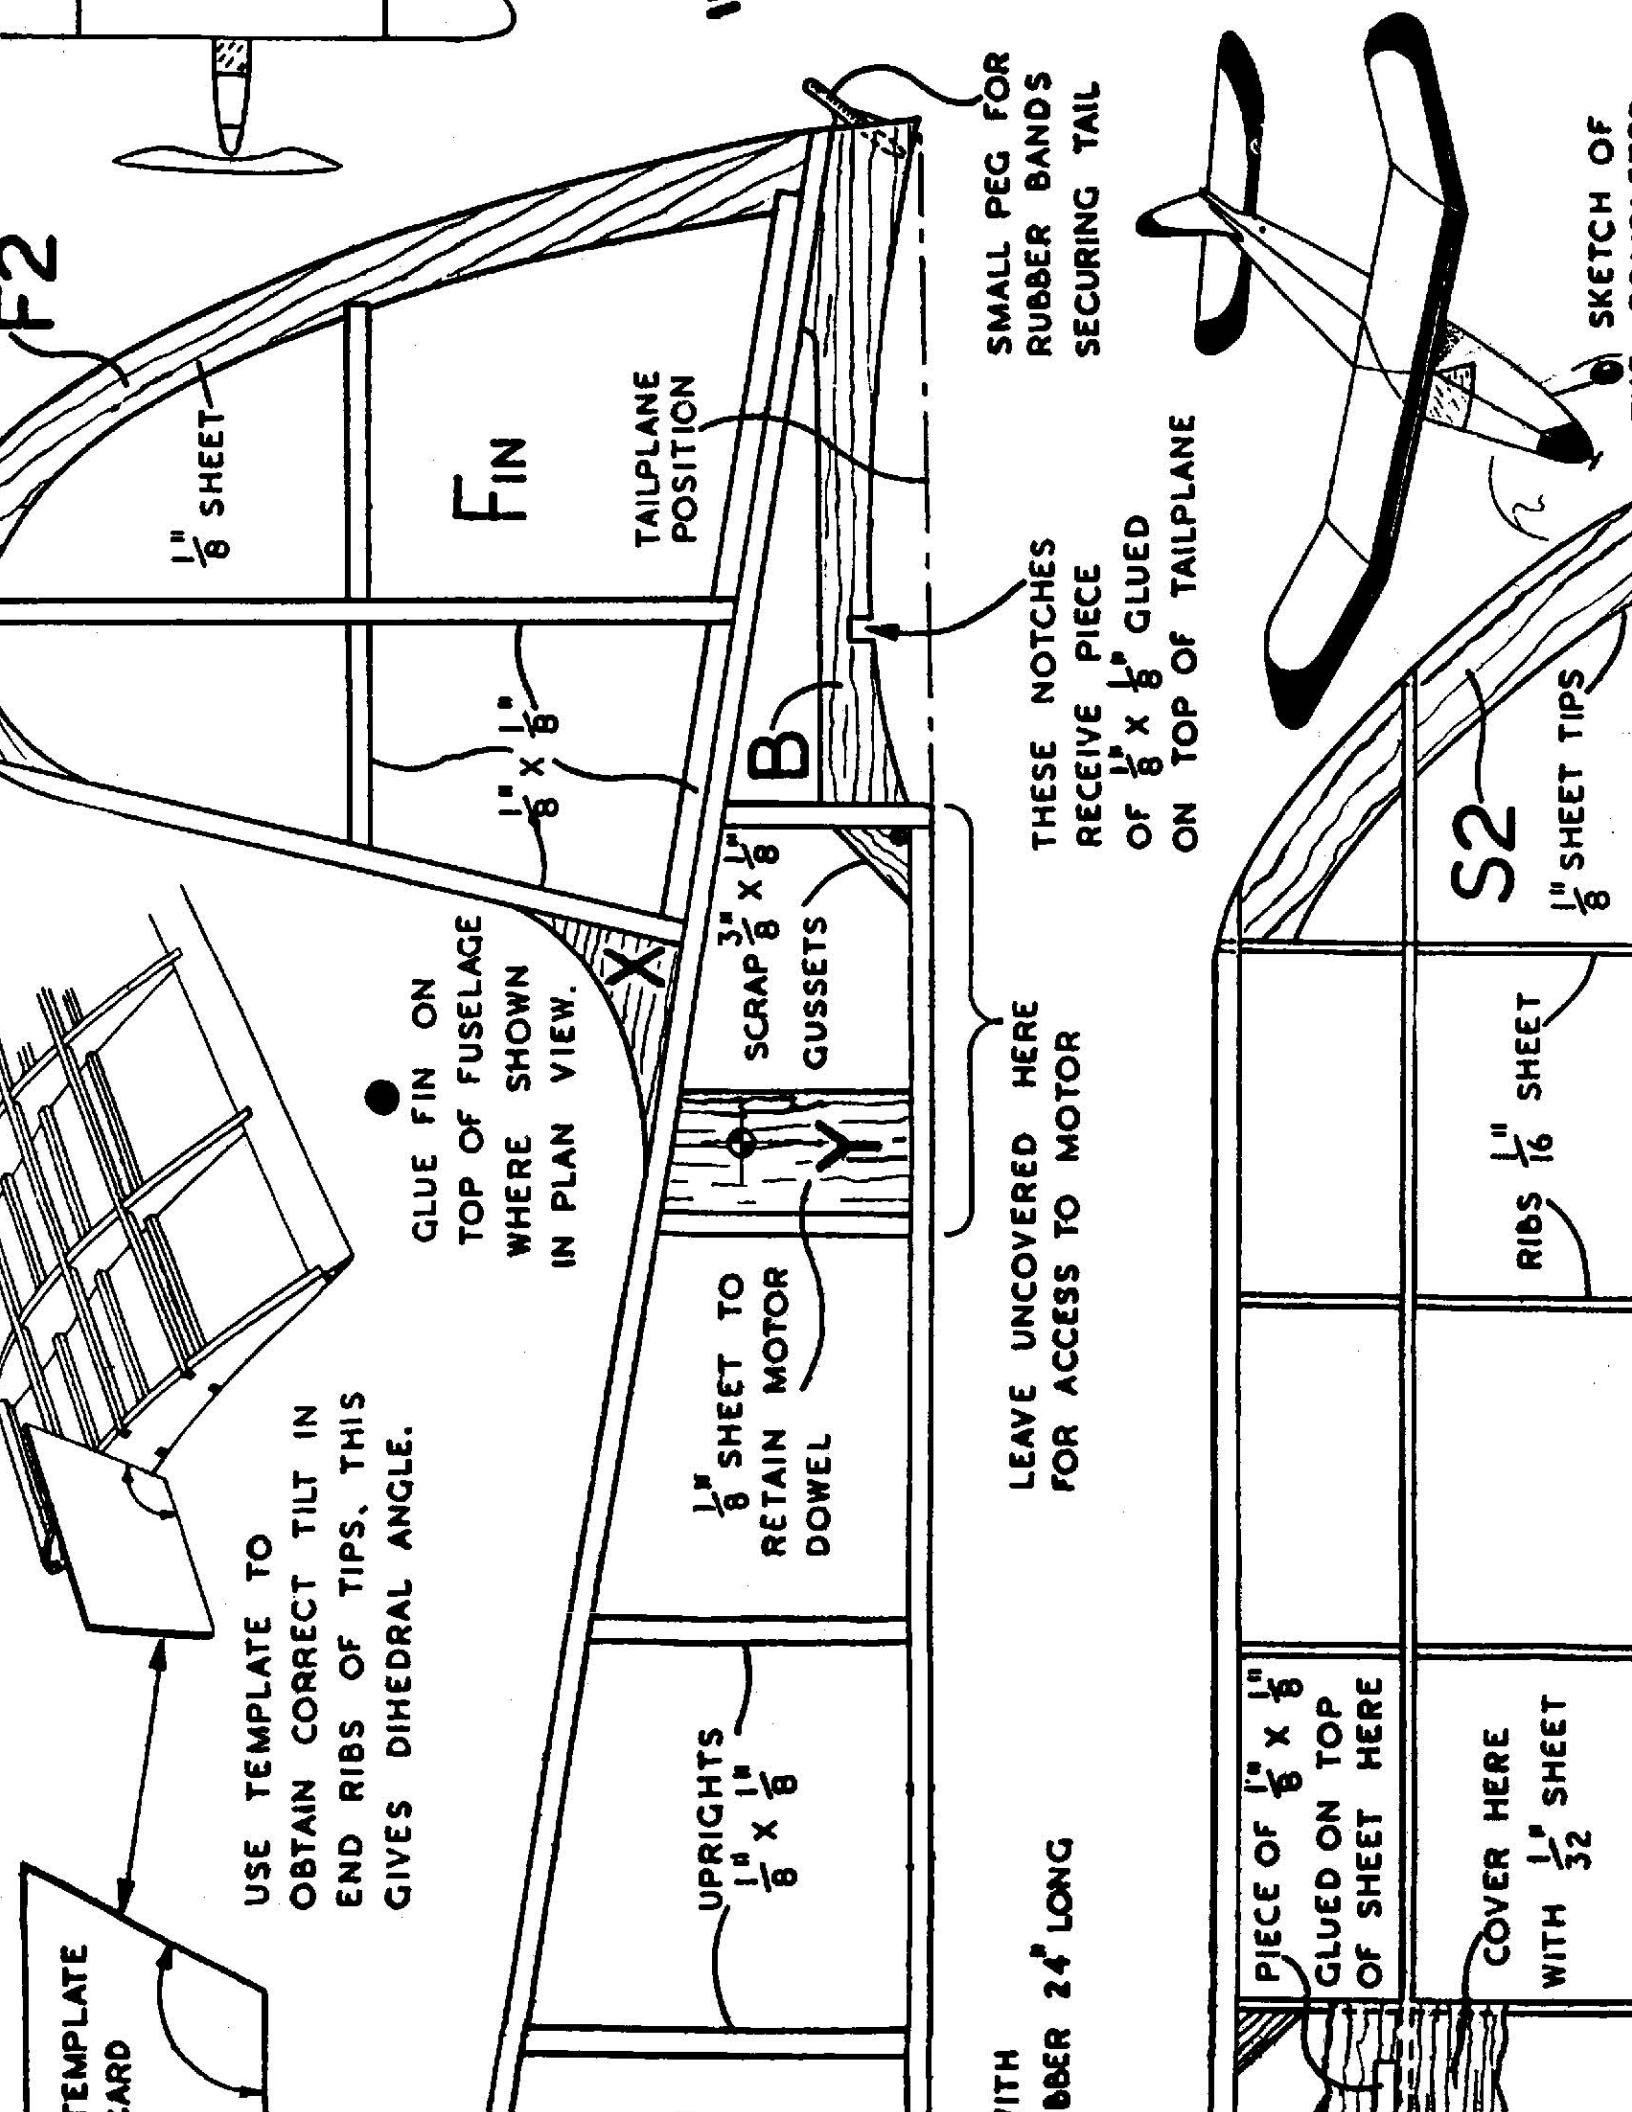

TEMPLATE BOARD

USE TEMPLATE TO OBTAIN CORRECT TILT IN END RIBS OF TIPS. THIS GIVES DIHEDRAL ANGLE.

GLUE FIN ON TOP OF FUSELAGE WHERE SHOWN IN PLAN VIEW.

UPRIGHTS $\frac{1}{8} \times \frac{1}{8}$

$\frac{1}{8}$ SHEET TO RETAIN MOTOR DOWEL

SCRAP $\frac{3}{8} \times \frac{1}{8}$ GUSSETS

FIN

TAILPLANE POSITION

WITH RUBBER 24" LONG

LEAVE UNCOVERED HERE FOR ACCESS TO MOTOR

THESE NOTCHES RECEIVE PIECE OF $\frac{1}{8} \times \frac{1}{8}$ GLUED ON TOP OF TAILPLANE

SMALL PEG FOR RUBBER BANDS SECURING TAIL

PIECE OF $\frac{1}{8} \times \frac{1}{8}$ GLUED ON TOP OF SHEET HERE


COVER HERE WITH $\frac{1}{32}$ SHEET


RIBS $\frac{1}{16}$ SHEET

S2

$\frac{1}{8}$ SHEET TIPS

SKETCH OF

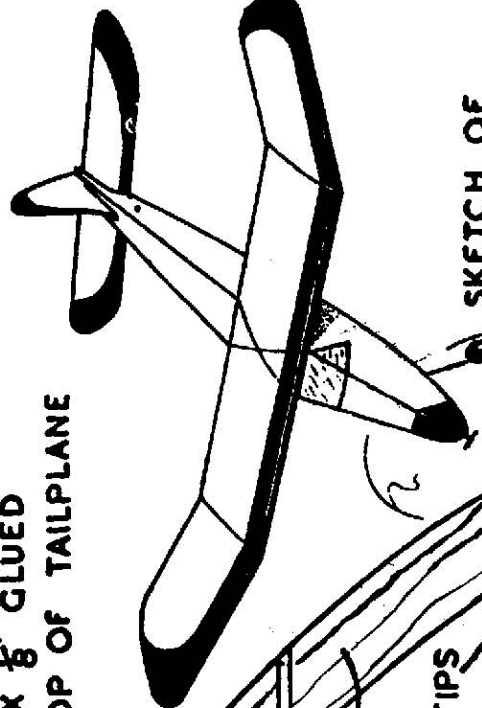

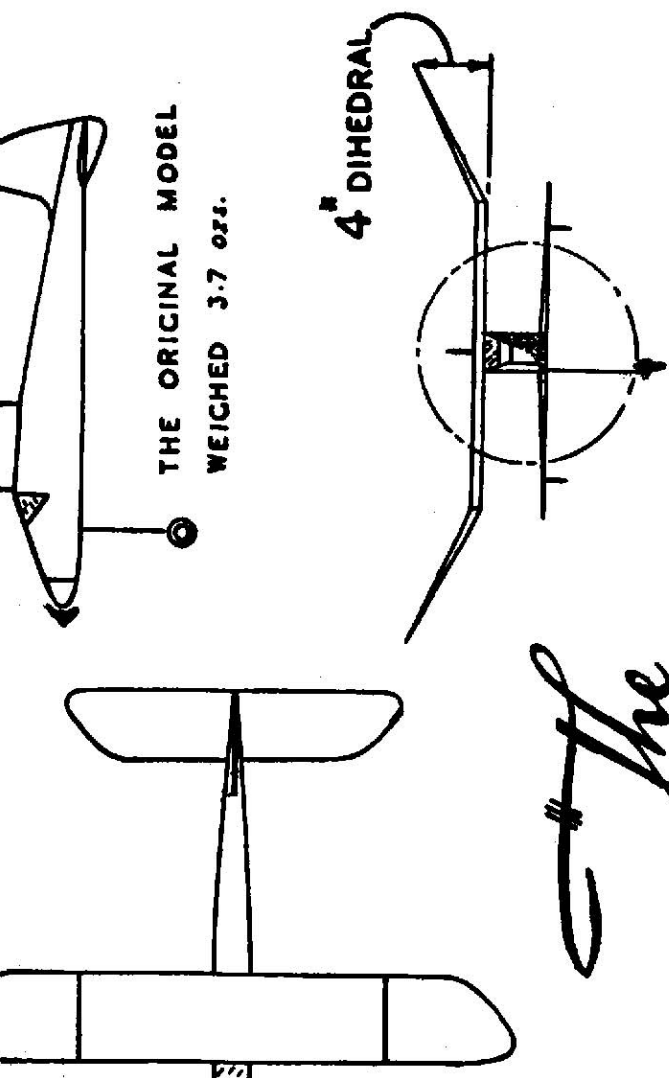

THE ORIGINAL MODEL
WEIGHED 3.7 ozs.

4° DIHEDRAL

The

"Senator"

30" SPAN CABIN DURATION MODEL
— MANUFACTURED BY —

KITKRAFTKITS

BUILDING INSTRUCTIONS

- FUSELAGE**
 Pin down the longerons for one fuselage side by placing pins on either side of the stripwood. Cut the uprights to correct lengths and glue these accurately in place over the positions indicated. Glue piece 'B' in place at the rear end, also piece 'Y' and piece of 1/8" sheeting at the nose. When this first side is dry build a second side directly over it. Remove both sides from plan when they have set and separate them very carefully with a thin knife. Hold the extreme rear ends together with a Bulldog paper clip and insert top and bottom cross braces at the wing position. Check trailing edge in similar manner, glue the ribs in their correct positions and pull the spars up into the notches. Cement leading edge into front notches provided in ribs, then add top three spars and the gussets where shown. The Tips are constructed by locating the three bottom spars in between pins as for the Centre Section, pin down the Trailing edge, position the ribs with pins apply glue to the lower rib notches and pull the spars up into these notches. SEE NOTE REGARDING TILT IN END RIBS as this governs the amount of dihedral at the extreme tips. Add the leading edge and tip pieces, join the spars to the tips as shown. The bottom spars terminate inside the tip pieces, the top spars are

IN THE NOSE.

12-13"
AIRSCREW

A BOBBIN USED
ON THE MOTOR
HOOK PREVENTS
WIRE CUTTING
RUBBER MOTOR




1 1/2"

BOBBIN




1 1/2" DIA.
WHEEL



HARDWOOD OR —
HEAVY Balsa NOSE
BLOCK

U/C WIRE
POSITION

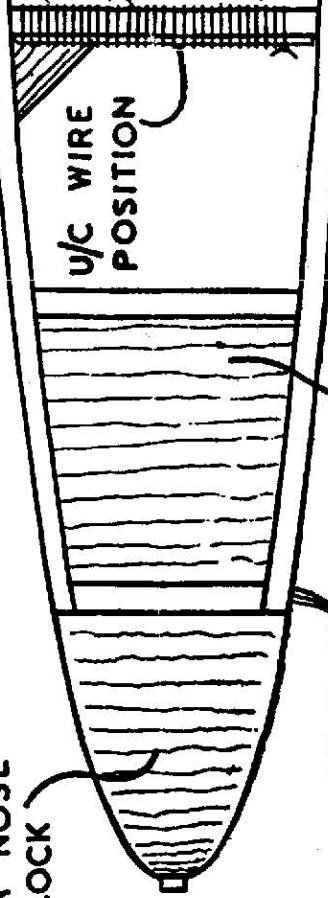


BIND THREE TURNS
OF THREAD ROUND
THE NOSE WHEN
BODY IS ASSEMBLED.
GLUE WELL.

1/8" SHEET

LET IN FLUSH

CELL

1/8"

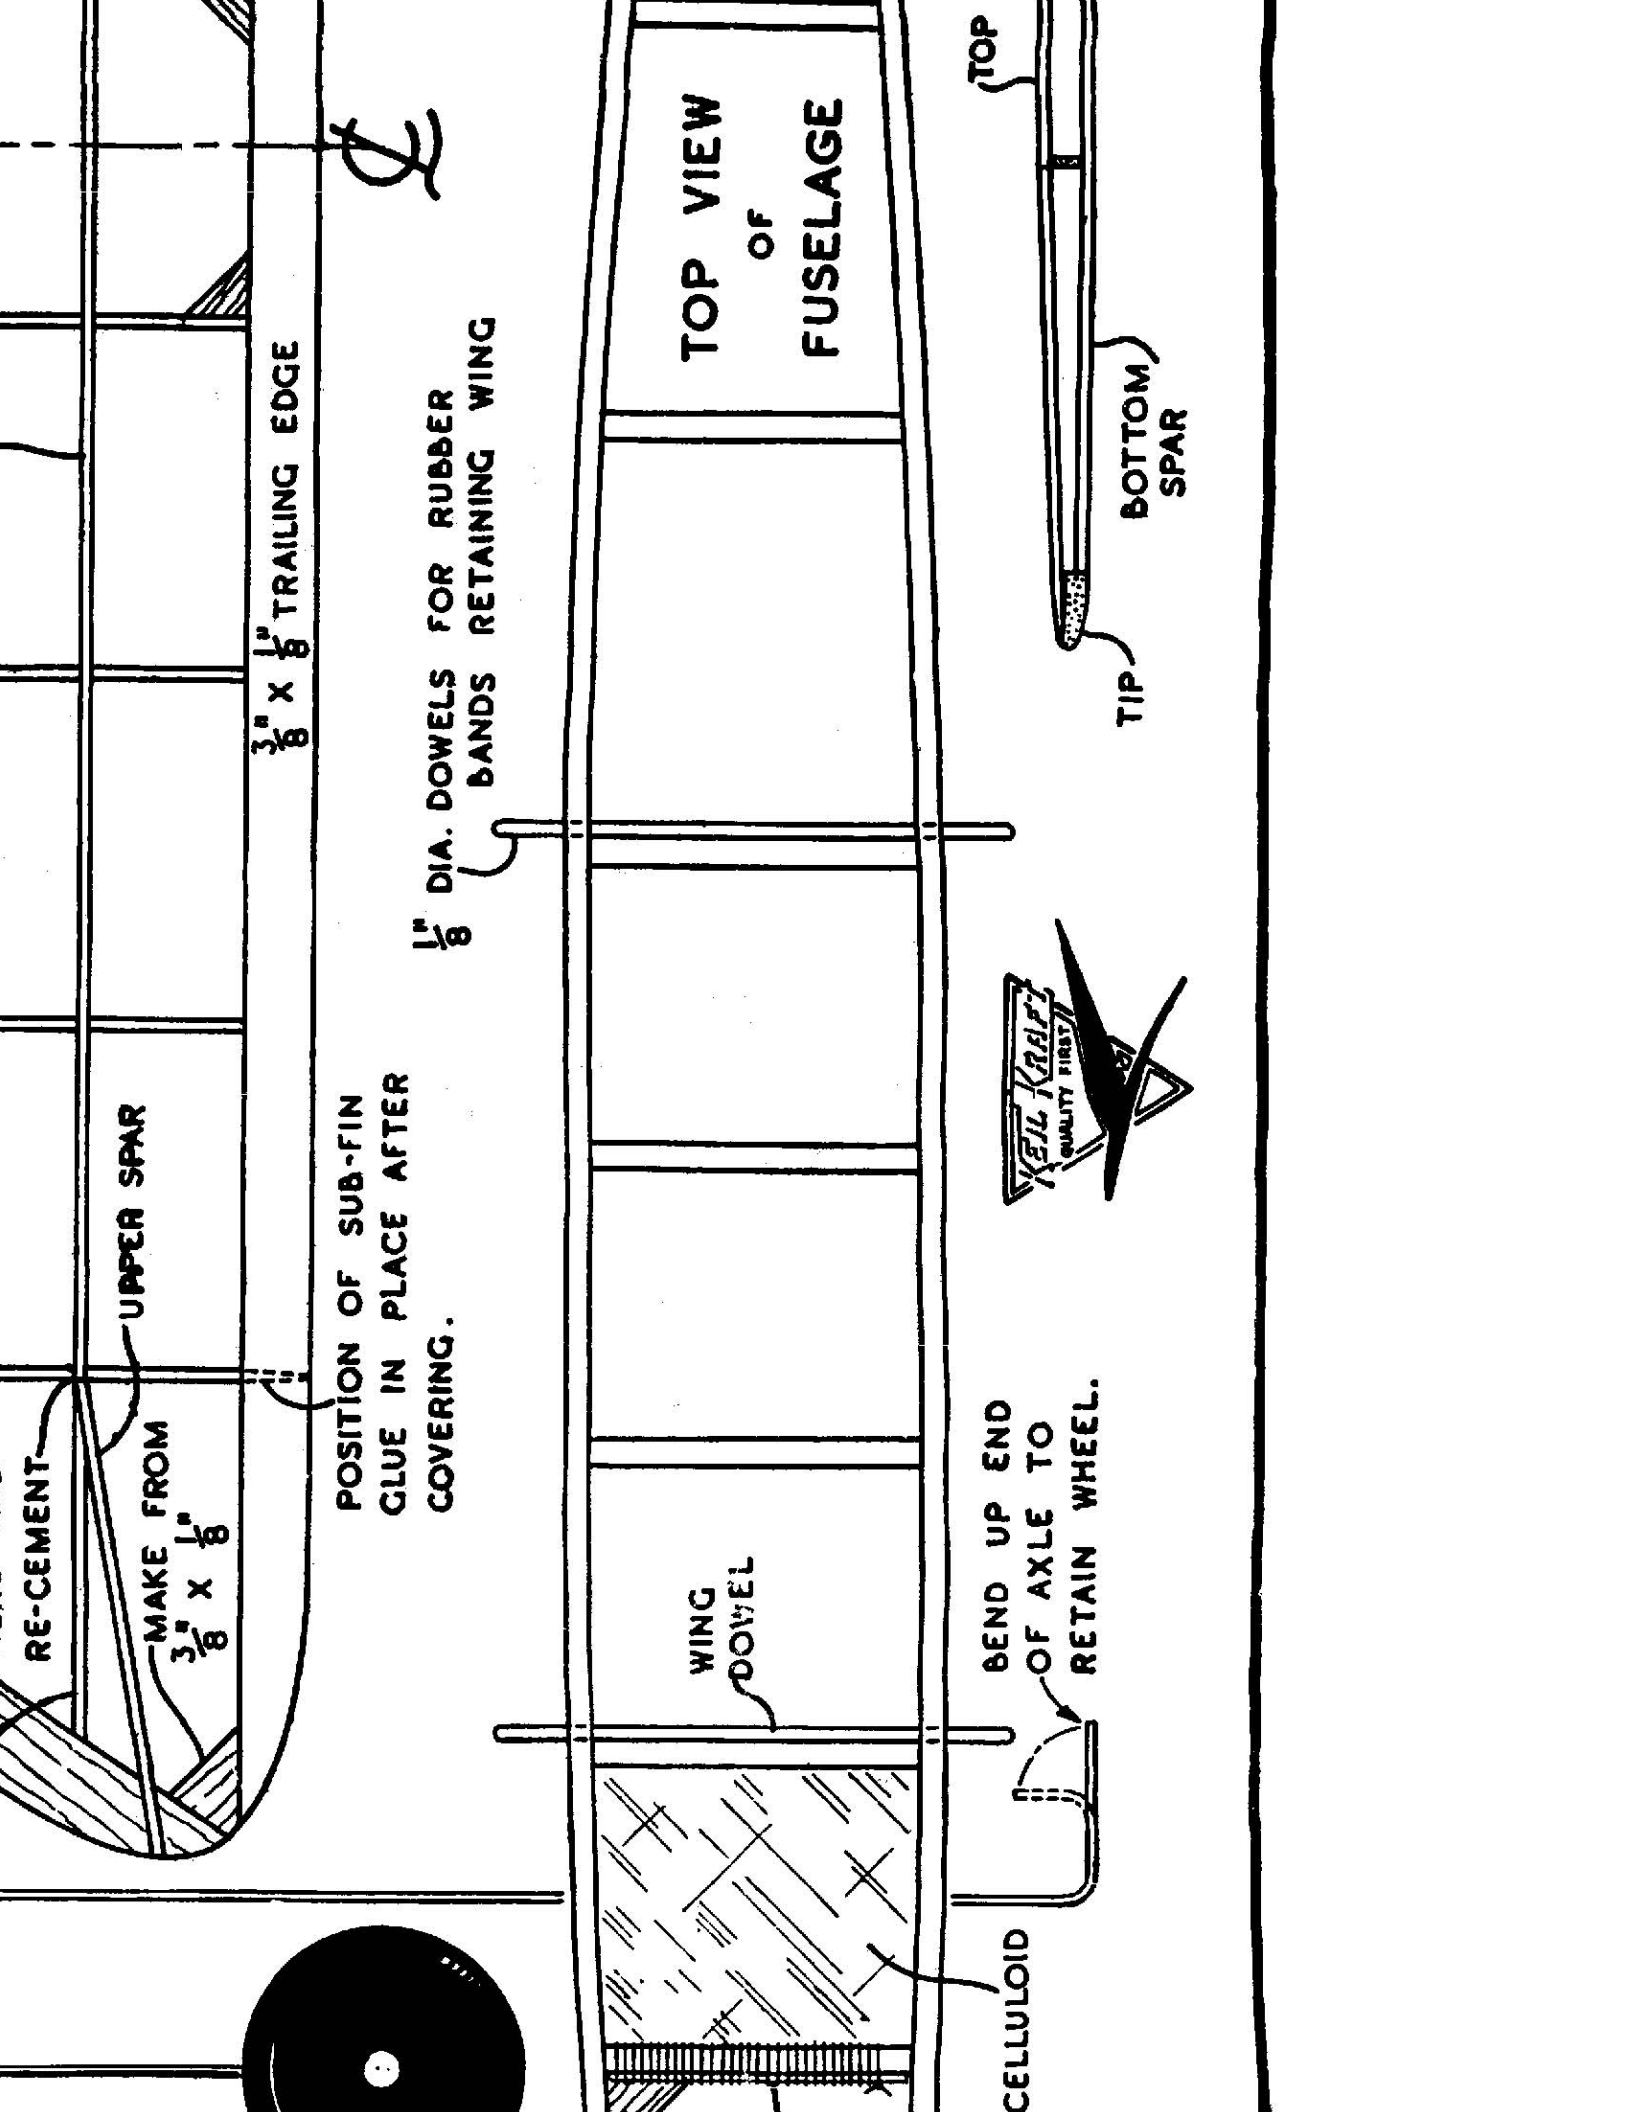

RE-CEMENT

UPPER SPAR

MAKE FROM
 $\frac{3}{8}$ " x $\frac{1}{8}$ "

$\frac{3}{8}$ " x $\frac{1}{8}$ " TRAILING EDGE

POSITION OF SUB-FIN
GLUE IN PLACE AFTER
COVERING.


$\frac{1}{8}$ " DIA. DOWELS FOR RUBBER
BANDS RETAINING WING

WING
DOVEL

TOP VIEW
OF
FUSELAGE

BEND UP END
OF AXLE TO
RETAIN WHEEL.


CELLULOID



TIP
BOTTOM
SPAR

TOP

SKETCH OF THE COMPLETED MODEL...

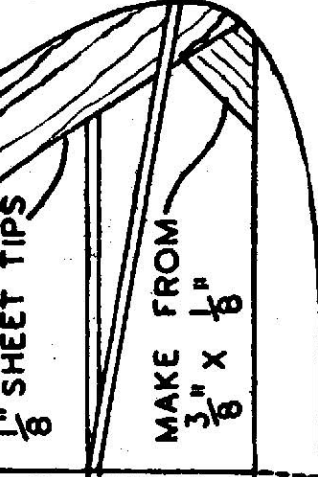

1/8" SHEET TIPS

MAKE FROM 3/8" X 1/8"

32 SHEET

SCRAP 1/8" SHEET GUSSETS.

POSITION OF SUB-FIN


TYPICAL TAILPLANE SECTION



GLUE SUB-FINS WHERE SHOWN ON UNDERSIDE OF TAILPLANE.



1/8" DIA. MOTOR DOWEL

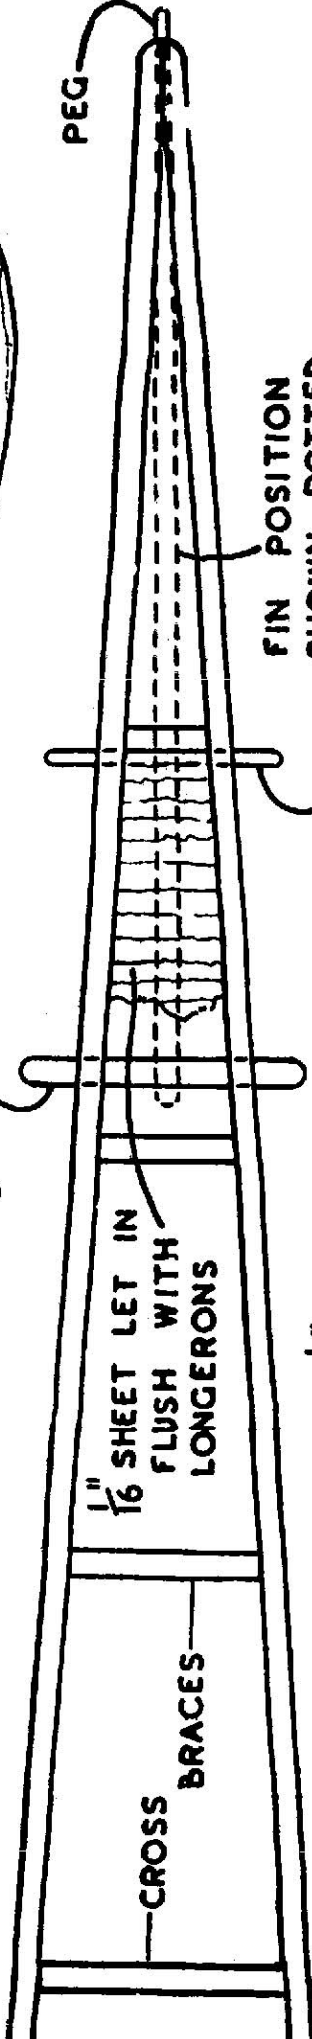

1/16" SHEET LET IN FLUSH WITH LONGERONS

CROSS BRACES

FIN POSITION SHOWN DOTTED, GLUE FIN HERE SQUARELY & FIRMLY.

1/8" DIA. DOWEL FOR RUBBER BANDS HOLDING TAIL.

PEG

TOP SPAR

SECTION THRO' TIP OF TAIL SHOWING SPAR JOINS TO TIP PIECE

DESIGNED & DRAWN by ALBERT E. HATFULL

tips. Add the leading edge and tip pieces, join the spars to the tips as shown. The bottom spars terminate inside the tip pieces, the top spars are carried over the tip as can be seen in the sectional view through tip. When the three wing sections have set glue the tips to the centre section and leave to dry with the tips propped up 4". Finally sand paper the leading and trailing edges to shapes shown and finish smooth-all over.

● TAILPLANE

Build the tailplane in similar fashion to the wing, cover the centre portion with 1/32" sheet, and glue a piece of 1/8" square exactly where indicated on the top surface. The sub-fins are added after covering with tissue. Round off the leading edge and tips, taper the trailing edge down and fine sandpaper all over.

● COVERING

When covering the model use tissue paste or tissue cement for an adhesive. Cover the fuselage sides then top and bottom applying paste to the actual outline only. The wing is covered in six pieces, three above and three below. It is important that the tissue should be made to adhere to the lower spars of the wing also to the under side curve of the ribs which is known as the "undercamber." Use two pieces of tissue for the top of the tailplane and one for the underside. While covering any part of the model endeavour to eliminate as many wrinkles as possible. When all the parts are covered spray lightly with water and allow to dry, this tightens the covering prior to the application of dope. Apply two coats of dope to the fuselage, two thin coats to the wing and one coat to the fin and tailplane.

FLYING INSTRUCTIONS

leading edge of the tail, if it stalls, i.e. noses up and wavers unsteadily, add a small amount of plasticine inside the nose block (or remove any previously placed in the tail). Continue test gliding until a long floating glide is obtained. Give the motor 100 to 200 turns preferably "stretch" wound, place a strip of 1/16" down the left hand side of the nose block, then launch. The strip of 1/16" packing is to induce side thrust and should impart a right handed circling climb to the model. A small celluloid "trim tab" 1 1/2" x 1/4" glued down the trailing edge of the fin may be used to obtain a tighter turn under power followed by a larger gliding circle.

knife. Hold the extreme rear ends together with a Bulldog paper clip and insert top and bottom cross braces at the wing position, check for squareness and leave fuselage resting on the lower longerons until dry. Insert the cross braces at the extreme nose holding the sides in with a rubber band until set, then bind nose with thread and cement well. (see Top View) add the remaining cross braces top and bottom checking for squareness as you proceed. Glue 1/8" sheet flush in top and bottom of nose, glue 1/16" flush in the top at fin position. Bend U/c wire to shape, place wheel on axle and bend up the end of the wire to retain the wheel, bind wire in place where shown in Side View apply cement over thread for extra strength. Cut the sheet celluloid to shape and glue in place for the cabin. Add wing and tail fixing dowels and the gussets to strengthen them. Roughly carve nose block to shape, build plug on back face as noted, plug into nose and sandpaper to a smooth finish while on fuselage, remove and drill hole in position shown to receive propeller shaft bearing bush. Glue this bush firmly in place. Bend motor hook, thread nose block, cup washers and airscrew on the shaft and with pointed nose pillars band the freewheel loop. Bend the freewheel latch to shape and attach to airscrew. Pin the outline of the fin to the plan, add pieces of 1/8" square, when dry sandpaper the rear edge to a taper and round off the leading edge. Glue the fin in place squarely on top of the fuselage where indicated, glue the framing 'X' in place. Sandpaper the whole fuselage with fine sandpaper to obviate rough edges, etc

● WING

Commencing with the Centre Section, pin down the three bottom spars by placing pins on either side of the 1/16" stripwood, position the

Assemble the model and insert the specified rubber motor in to the fuselage. Choose a comparatively calm day for test flights and select a field with fairly long grass. Your particular model may need balancing and this is executed by adding ordinary plasticine to the inside of the nose block or inside the extreme rear end of the fuselage i.e. directly over the tail position. The model should be made to balance level when held on the fingertips at the third spar back from the leading edge. Now glide the model into the wind, launch it firmly and parallel to the ground, if it dives or noses down place a thin 1/32" to 1/16" strip of balsa under the