



# FOCKE - WULF STOSSER

*Complete plans and directions for building a high performance miniature of a world-famous German sportster.*

By PAUL PLECAN and ROGER HAMMER

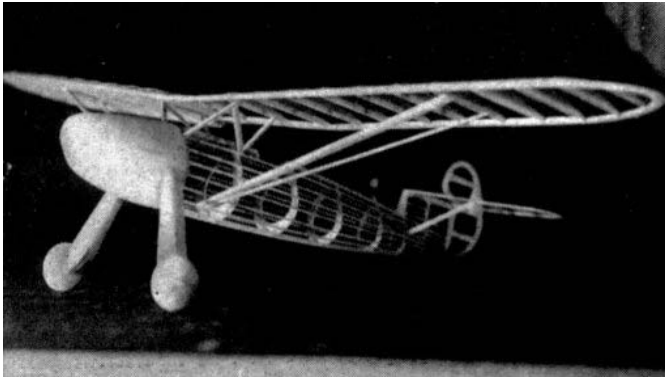

**The framework of the model is distinctive. Master stringers make fuselage construction simple. The nose block and sturdy landing gear legs make a sturdy ship. Note the position of the stabilizer.**

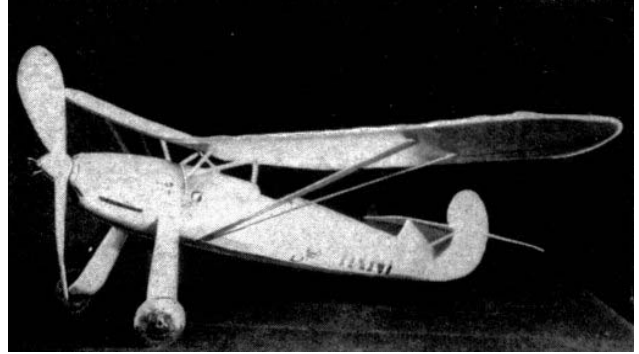

**When covered, the model becomes difficult to distinguish from the real ship. The parasol arrangement affords a really stable job. The sweepback increases longitudinal and directional stability.**

Any model builder who has looked for a model that was one hundred percent scale and yet stable enough for flight with the scale tail surfaces, will know how rare such a model is. The Focke-Wulf Stosser fills the bill. Scale outlines of the tail surfaces are shown on the plans, as they have been proven to be of sufficient size for a stable flying model.

Used mainly for training purposes, the Stosser mounts an Argus inverted V-6 engine which gives it a top speed of 167 miles per hour. The cruising speed is 154 m.p.h., and the landing speed is 56 m.p.h. The Stosser is a familiar sight to many, as it was brought over by Gerd Acheglis for participation in the acrobatic events at the past few National Air Races. The plans reproduced on the next few pages will produce an accurate model of Gerd Acheglis' original ship, that is, if they are followed explicitly.

## FUSELAGE

Since the fuselage is the toughest part, let us tackle it first. Cut out the master stringers and formers. Before proceeding any further, note that there are two notches in the tail end of each side master stringer. Mark off the positions of all the formers on each master stringer, and cut the grooves in the formers. After assembling, check

the whole unit for alignment, as some of the master stringers are bound to be slightly warped. The tail hook -- tail skid may be bent to shape and cemented in place now, as there are no stringers to impede your work. After this has been done, cement the 1/16" square stringers in their respective places. Check again for alignment, and correct if any warps are apparent. Trace the side view of the engine nacelle (or cowl) on a soft balsa block measuring 2 x 2-1/8 x 3". After shaping to conform with the side view, repeat the process for the top view. Cut down the outside of the cowl to the correct cross-section and sand until smooth. Apply dope (wood filler is better for this if it is available) and sand very smooth when dry.

The cowl should be cut in half now, and hollowed out to the thicknesses shown on the plans. Cement together, and conceal the saw mark where the cowl was cut in half by applying successive coats of dope and sanding. The nose plug can also be made at this time, and care should be taken to have it fit quite snugly, as adjustments are easier this way. The front portion should be of very hard balsa, as it will take a lot of abuse. Cement the two parts together and add the two washers. (Note the

slight right thrust and larger amount of down thrust.)

The landing-gear struts should be bent to shape and cemented to the fuselage. The front wire strut is bent back at the bottom to provide an axle for the 1-1/4" balsa wheel. Cut the balsa strut to the right size and insert between the two wire struts, cementing well. The fuselage covering maybe applied now, in small strips. Do not forget to add piece "A" to the tops of formers 6 and 7, as it supports the stabilizer. The fillet block in front of former 6 should be carved now and cemented in place, and the whole unit doped, since this will be harder when all the struts and details have been added. The fuselage is doped silver with two or three coats of dope, and set aside. After it has dried well, lettering and exhaust stacks may be added.

### TAIL SURFACES

The tail surfaces are made in a way that provides extreme flexibility and consequently easier adjustments. The rudder and stabilizer are both cut from 1/16 x 3" sheet, and care is taken to have the grain running the right way, as shown on the plans. After the stabilizer has been covered, the small fins shown in the side view should be cemented on. The rudder should also be covered, and both the parts doped silver. The easiest way of duplicating the insignia shown on the rudder is as follows: Dope a red band around the rudder and set aside. While the red dope is drying, cut a small circle from white bond paper. On this paper draw the swastika and fill in with black india ink. Cement the paper circle on the middle of the red band-and there you are, a very neat job done with a minimum of effort and time.

### WING

Cut the ribs out of 1/16" sheet, making two of each, except #3, of which fourteen should be cut out. The 1/16" thick wing spar should be cut to the depths shown by the rib notches. Assemble the wing on a flat surface, such as a drawing board, and cement the parts together. Break the leading and trailing edges at the proper points, set at the right angle to secure 1-1/4" dihedral, and cement. The whole wing can be covered now and doped silver. Do not forget

to draw the letters on the wing at this point, as it will be very hard to do the lettering if the struts are in place.

### ASSEMBLING



The easiest way to get the wing at the right incidence and position is to cut a small piece of scrap sheet to the outline formed by the bottom of the wing and the top of the fuselage. Pin this jig on the fuselage and then pin the wing to the top of it. Fit the struts by the "cut and try" method, and after they have been cut to the right size and sanded to a streamlined shape, cement them in place. After you have fitted all the struts, take the pins out of the jig and remove it. Add slight amounts of cement to the joints between the struts and the wing until a small fillet forms. This will not only enhance the appearance, but will duplicate the streamlined fairings on the original ship.

Cement the stabilizer onto part "A," and fit the rudders so that it will turn the model to the right when gliding. Cut the propeller from a medium block, of the size shown on the plan, and carve so that it has about 3/32" or 1/8" under-camber. Add the two half cones to the side of the prop and then the top cone. The freewheeling shown may be used, but this is entirely up to the model builder. Add the small details, such as the step on the left side of the ship and the "N" strut between the main struts and the bottom of the wing. The aileron and rudder outlines can be simulated with a narrow strip of black tissue cemented or doped over the finished wing.

Since the entire model will weigh between .7 and .9 ounce (depending on the materials used, of course), four strands of 1/8" flat rubber will do for normal flight. When lubricated, with an inch of slack, the rubber can be wound up to 750 turns without fear of breakage. If you are in doubt as to the freshness of the rubber, however, do not use more than 600 turns. Testing can best be accomplished on a grass-covered field or lawn, but if you are a "city slicker" you'll have to R.O.G. your model with successively larger amounts of turns in it for adjustments.

***Scanned From November 1938  
Air Trails***

BREAK AT THIS POINT  
FOR DIHEDRAL




"N" STRUT




1 1/4" DIHEDRAL

SCALE PROPELLER

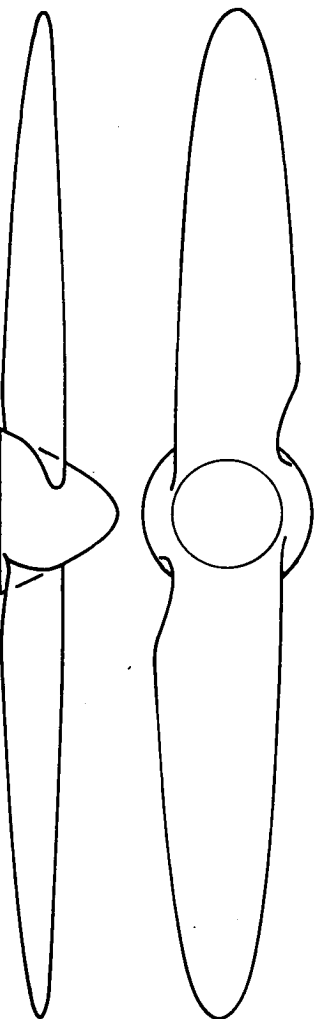

FRONT

SIDE



TOP

WASHERS

WASHER

FLYING PROPELLER—CUT FROM 7"x7/8"x1 1/4" BLOCK

NOSE PLUG

DETAIL

ABOVE SHOWS

NECESSARY


RIGHT AND DOWN


THRUST TO

CORRECT ANY

STALLING


TENDENCIES.

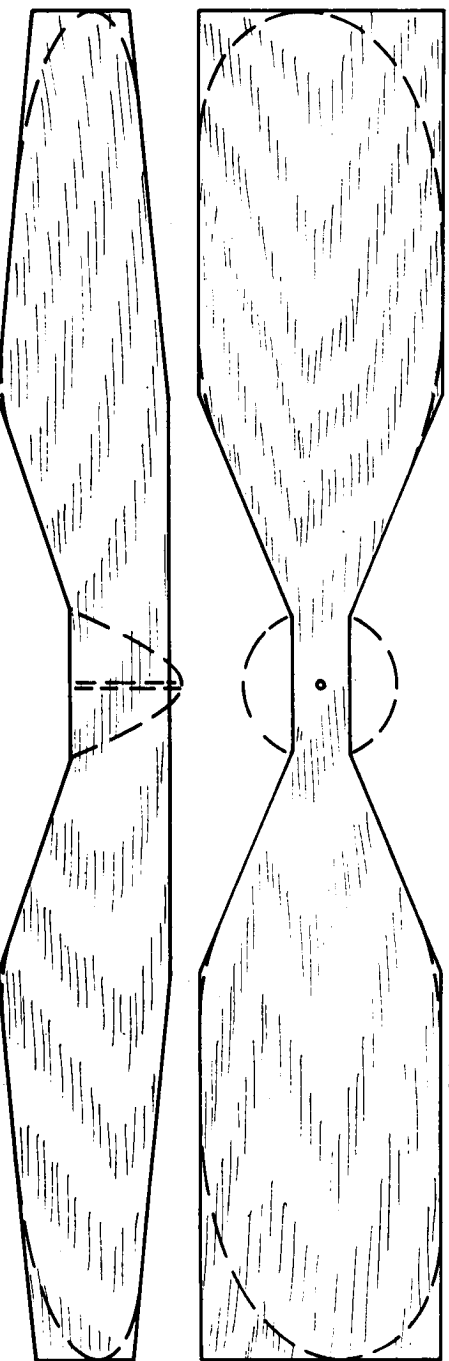

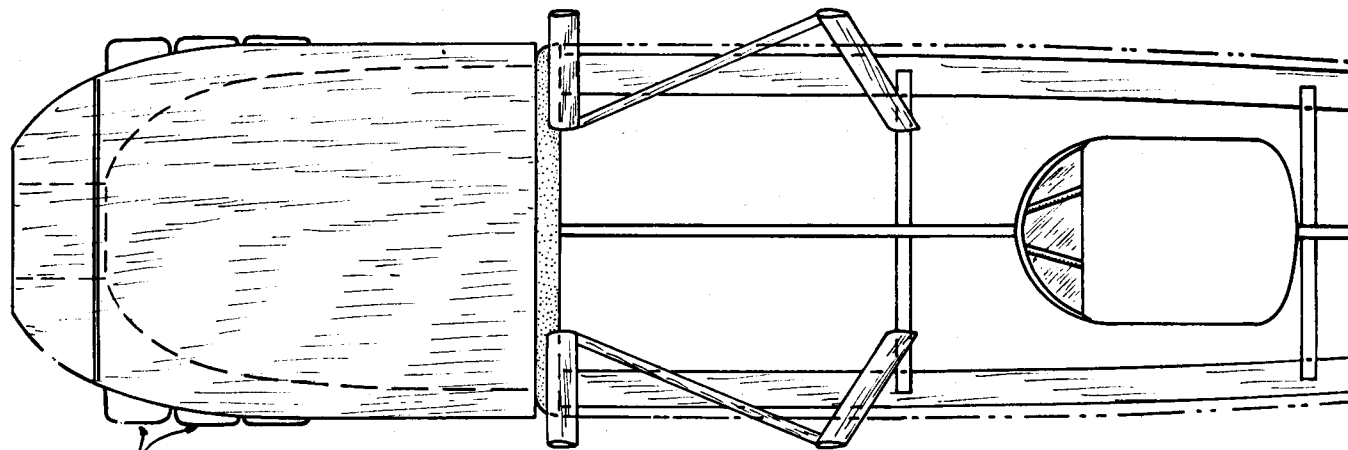


DUMMY EXHAUST STACKS  
(FLATTENED TUBING)

FORMER #1 IS  $\frac{1}{8}$ " THICK  
FORMERS #2 TO #7 ARE  $\frac{1}{16}$ " THICK

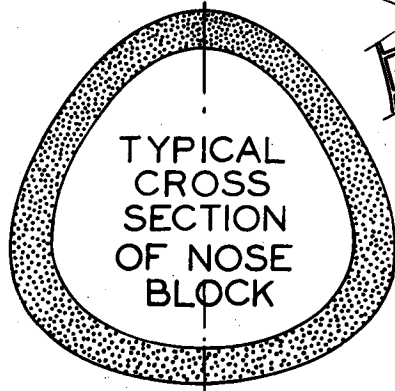


TYPICAL  
CROSS  
SECTION  
OF NOSE  
BLOCK

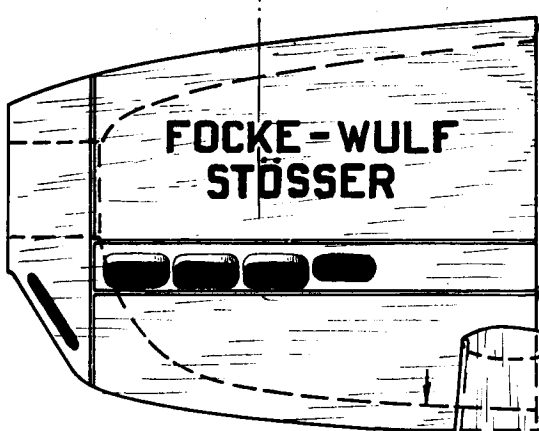


FOCKE-WULF  
STÖSSER



REAR OF COWL  
APPROXIMATELY  
 $\frac{1}{8}$ " THICK

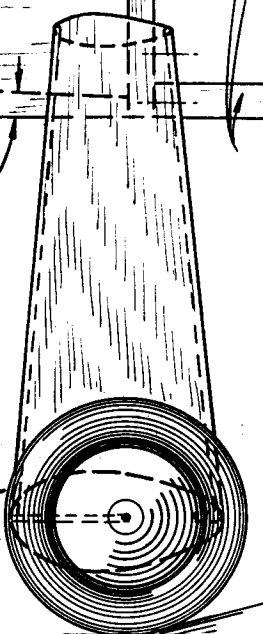

$\frac{1}{4}$ " BALSA  
WHEELS

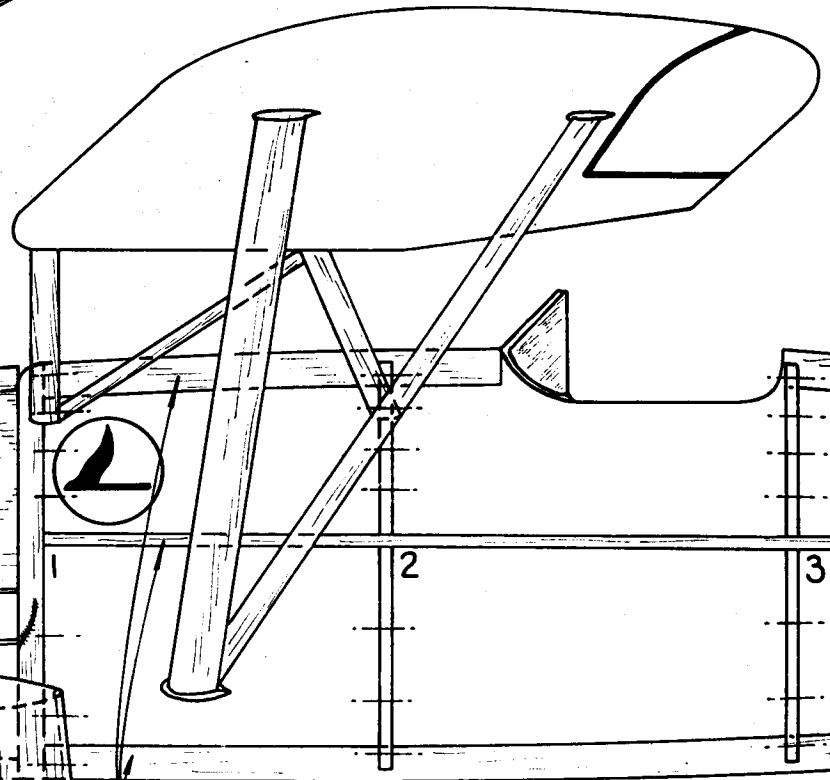

MASTER STRINGERS  
 $\frac{1}{16}$ " SHEET BALSA  
(SEE TEXT)

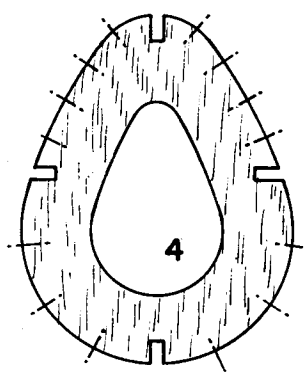

THIS LINE INDICATES WIDTH OF FUSELAGE AFTER STRINGERS HAVE BEEN ADDED

SIDE MASTER STRINGERS CUT AWAY AT THESE 2 POINTS

PIECE "A"

UPPER PORTION OF #1 IS ROUNDED OFF

3

2

DOTTED LINES INDICATE POINTS WHERE STRINGERS ARE TO BE ADDED

PIECE "A"  $\frac{1}{32}$ " SHEET

# D-I KNI

STEP




NOTE THAT REAR HOOK AND TAIL SKID ARE FORMED FROM SAME PIECE OF WIRE. RUDDER IS CUT IN ONE PIECE FROM  $\frac{1}{16}$ " SHEET BALSA.


WING LETTERING

**D-I KNI**

(TOP AND BOTTOM)


SEE TEXT ON COVERING

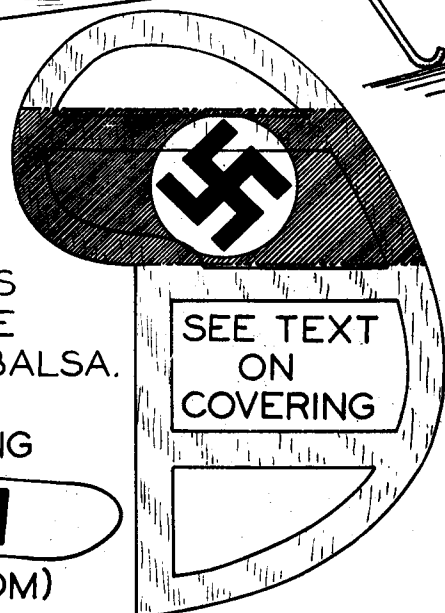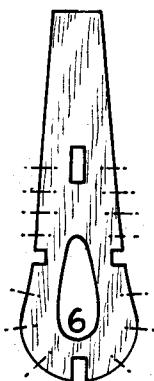

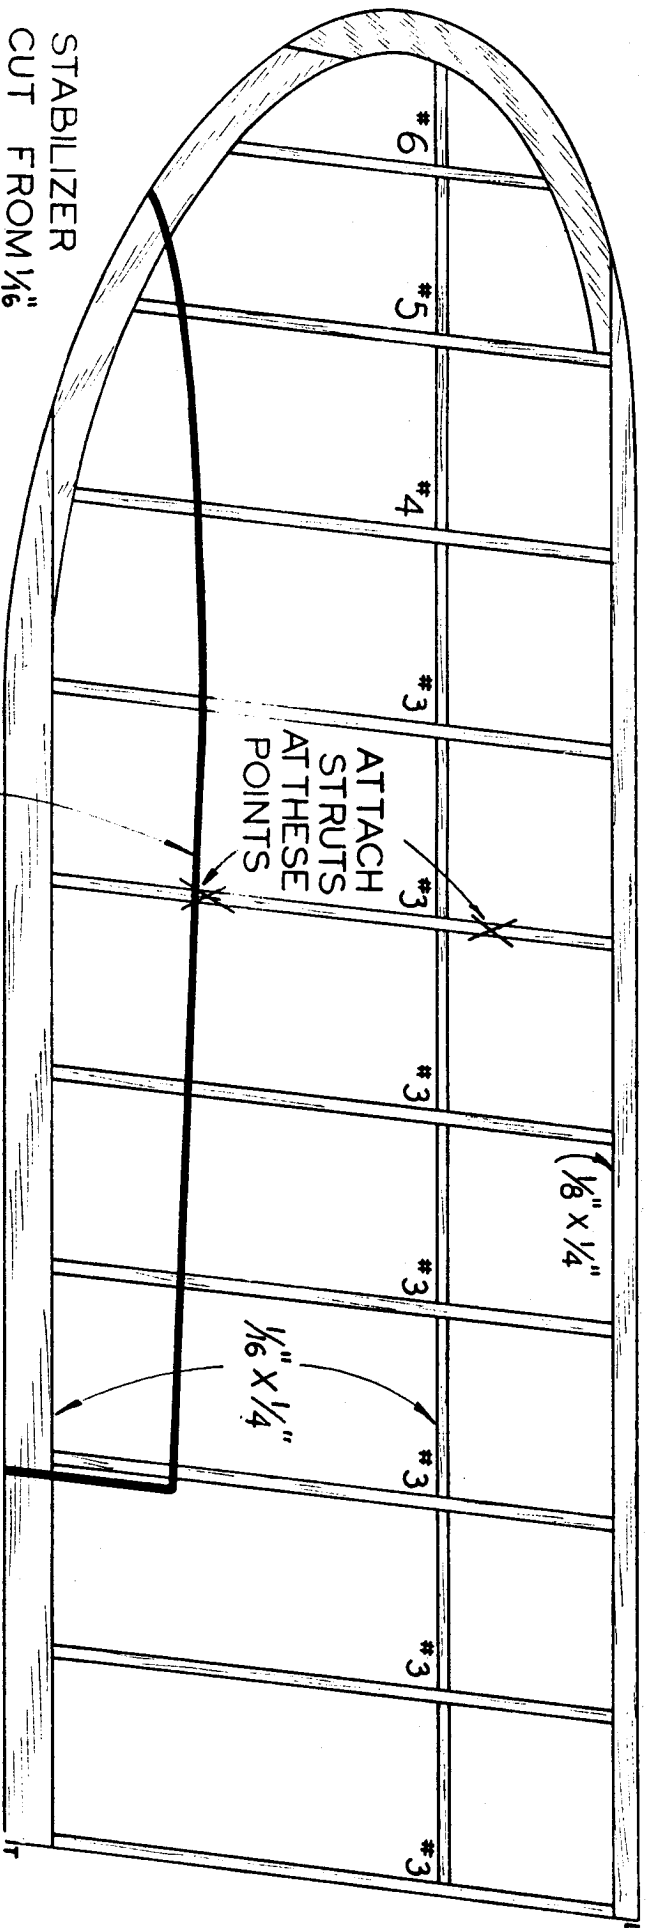

STABILIZER  
CUT FROM  $\frac{1}{16}$ "  
SHEET BALSA

STRIP OF BLACK TISSUE

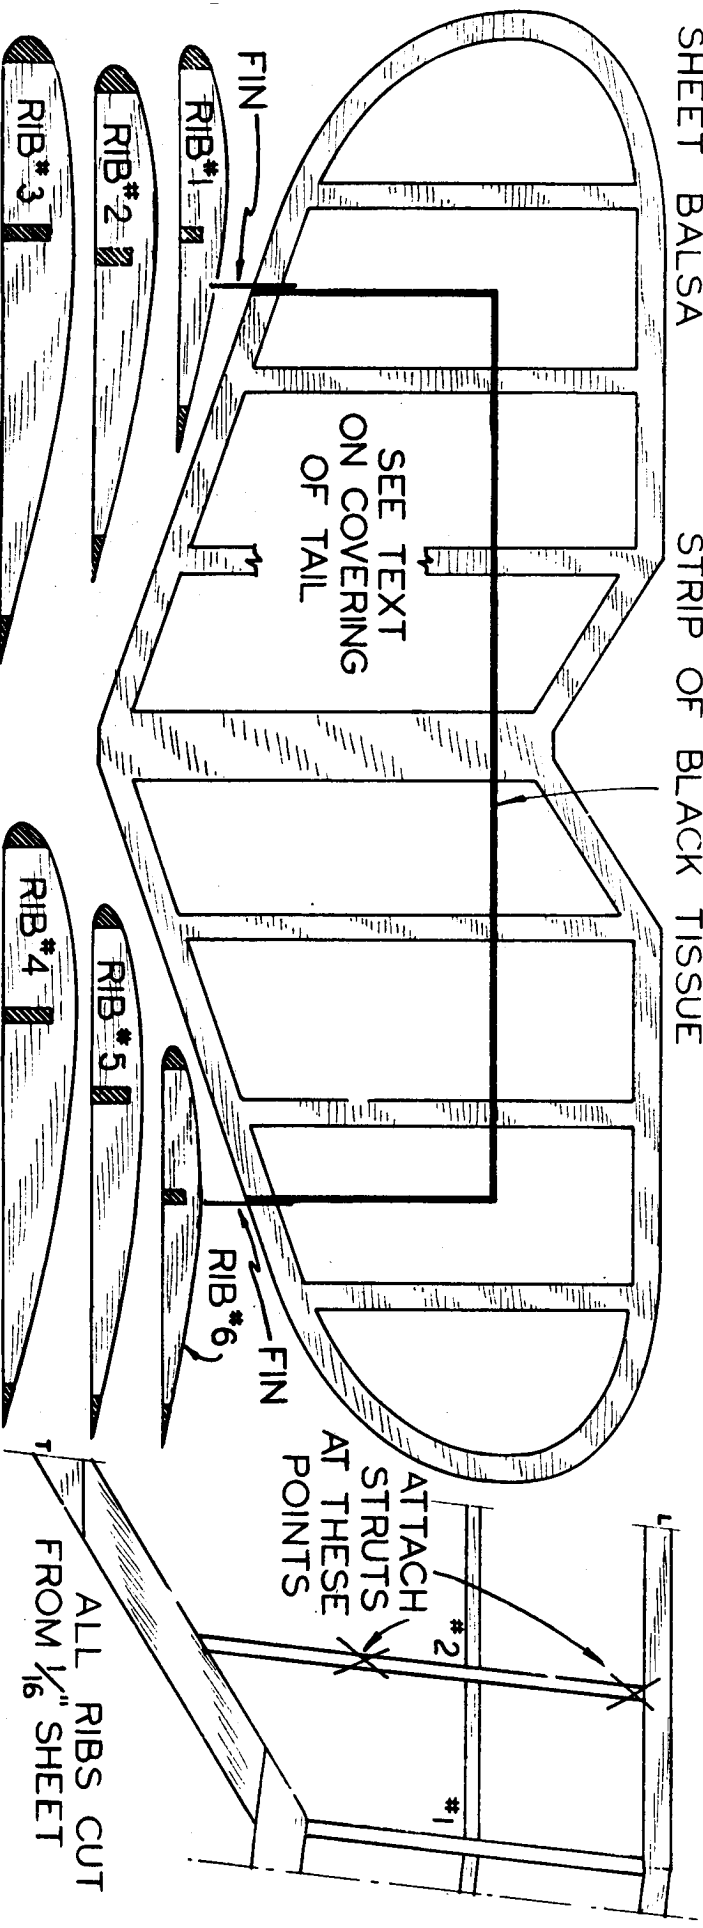

ALL RIBS CUT  
FROM  $\frac{1}{16}$ " SHEET